

Technical data sheet

TECHNICAL DATA

Supply Voltage (Vac):	230/50Hz		
Power Consumption (W):	2 (min speed) - 7 (max speed)		
Airflow (m ³ /h):	25 (min speed) - 150 (max speed)		
Revolution (RPM):	1100±50 (min speed) - 2350±50 (max speed)		
Pressure (Pa):	12 (min speed) - 56 (max speed)		
Noise Lw (dBA):	37 (min speed) - 60 (max speed)		
Noise Lp at 3 mt (dBA):	19 (min speed) - 40 (max speed)		

SENSORS


Temperature:	-40°C to +125°C		
Humidity:	0 to 100%		
Air Quality:	Hydrogen (H ₂)	1 to 1000 ppm	
	Carbon Monoxide (CO)	5 to 1000 ppm	
	Propane (C ₃ H ₈)	3 to 2000 ppm	(10% LIE)
	Iso-Butane (C ₄ H ₁₀)	5 to 2000 ppm	(10% LIE)
	Ethanol (C ₂ H ₆ O)	1 to 1000 ppm	
	Methane (CH ₄)	200 to 3000 ppm	
	Ammonia (NH ₃)	5 to 1000 ppm	

LIGHT SIGNALS

Active Functions:	RGB CENTRAL LED
Working and other states:	RGB RING LED

DIMENSIONS

Wide:	210 mm
Tall:	210 mm
Deep:	61+69 mm
Hole (Ø):	119 mm

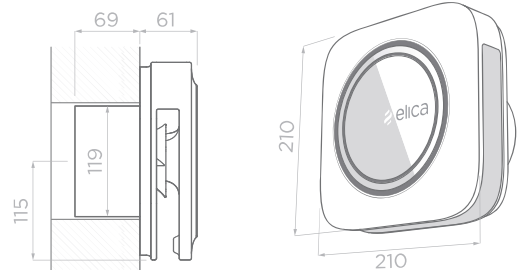

SYSTEM REQUIREMENTS

Wi-Fi connection

Android or iOS Smartphone. Via the stores, check that the app is compatible with the operating system your Smartphone is running. with iOS 13 or later - with Android 8 or later

*The manufacturer does not guarantee the correct compatibility of the APP with the most recent operating system versions except for future official updates of the APP itself released by Elica.

WIRELESS

Supported Wireless Security:	open, WEP, WPA2
Working Wi-Fi Connection:	802.11 b/g/n @ 2.4GHz
SSID:	not hidden
Wi-Fi enterprise connection:	not supported